




Model 29 has the panel hinged on the side and is operated the same as Model 39 illustrated on this side of folder. When opening panel the stairway is brought part way down and then slid through guides until it reaches the floor. This model is only furnished in standard sizes up to 9 ft. 7 in. from floor to floor and for a 2 ft. wide finished opening.

Model 29 Price \$29.50

Floor to Floor	Radius from Hinged End to Free Wall or Rafters. The Difference Plumb Up is 2" Less on Each Foot	From Front Edge of Stair Stringers to Landing When Stair is Down on Floor	Finished Opening
7 ft. 7 in.	4 ft. 8 in.	5 ft. 6 in.	2 ft. x 5 ft. 6 in.
8 ft. 1 in.	5 ft. 0 in.	5 ft. 10 in.	2 ft. x 5 ft. 6 in.
8 ft. 7 in.	5 ft. 4 in.	6 ft. 2 in.	2 ft. x 5 ft. 6 in.
9 ft. 1 in.	5 ft. 7 in.	6 ft. 6 in.	2 ft. x 6 ft.
9 ft. 7 in.	6 ft. 0 in.	6 ft. 10 in.	2 ft. x 6 ft.

Average shipping weight 80 pounds.

The Bessler Disappearing Stairway Co.
Akron, Ohio

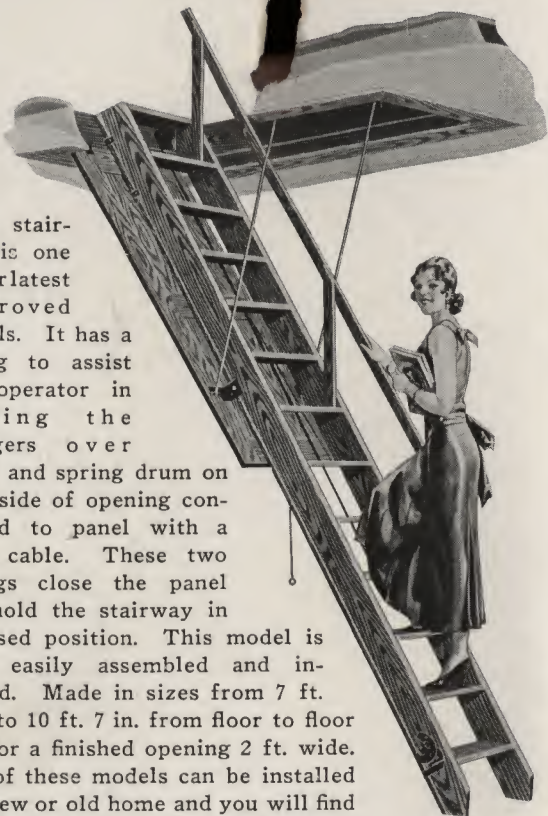

This stairway is one of our latest improved models. It has a spring to assist the operator in sliding the stringers over panel and spring drum on each side of opening connected to panel with a wire cable. These two springs close the panel and hold the stairway in a closed position. This model is very easily assembled and installed. Made in sizes from 7 ft. 7 in. to 10 ft. 7 in. from floor to floor and for a finished opening 2 ft. wide. Any of these models can be installed in a new or old home and you will find that the added space made available will be worth many times the cost of the stairway. Install one of our stairways in a home you have been trying to sell and see how helpful it will be in closing the deal with your prospective purchaser.

Model 35 Price \$35.00

Floor to Floor	Radius from Hinged End to Free Wall or Rafters. The Difference Plumb Up is 2" Less on Each Foot	From Front Edge of Stair Stringers to Landing When Stair is Down on Floor	Finished Opening
7 ft. 7 in.	4 ft. 10 in.	5 ft. 6 in.	2 ft. x 5 ft. 6 in.
8 ft. 1 in.	5 ft. 3 in.	5 ft. 10 in.	2 ft. x 5 ft. 6 in.
8 ft. 7 in.	5 ft. 7 in.	6 ft. 2 in.	2 ft. x 5 ft. 6 in.
9 ft. 1 in.	5 ft. 11 in.	6 ft. 6 in.	2 ft. x 5 ft. 6 in.
9 ft. 7 in.	6 ft. 6 in.	6 ft. 10 in.	2 ft. x 6 ft.
10 ft. 1 in.	6 ft. 10 in.	7 ft. 2 in.	2 ft. x 6 ft.
10 ft. 7 in.	7 ft. 1 in.	7 ft. 6 in.	2 ft. x 6 ft.


Average shipping weight 85 pounds.

For floor to floor heights up to and including 3 inches over measurements will apply. If over 3 inches, take the next larger rail and upper side of panel are stained. The under side it can be finished to match the woodwork in the hall or

ORDER BY MODEL

ALL MODELS CAN BE
OPERATED FROM
ABOVE AS EASILY
AS FROM BELOW.

Model 39 is very similar to Model 29 in operation and construction except that it is made for a 2 ft. 6 in. wide finished opening. The illustration shows the stairway in half way position. From this point, the stairway is slid down through guides attached to metal frame. When it is desired to close stairway, slide it back through the guides to a point where it is automatically locked and from there the counter-balance carries it into ceiling and the panel closes after it. The panel is held in an open position by a jointed arm and in a closed position with springs. This model is only made in sizes up to 9 ft. 7 in. from floor to floor.

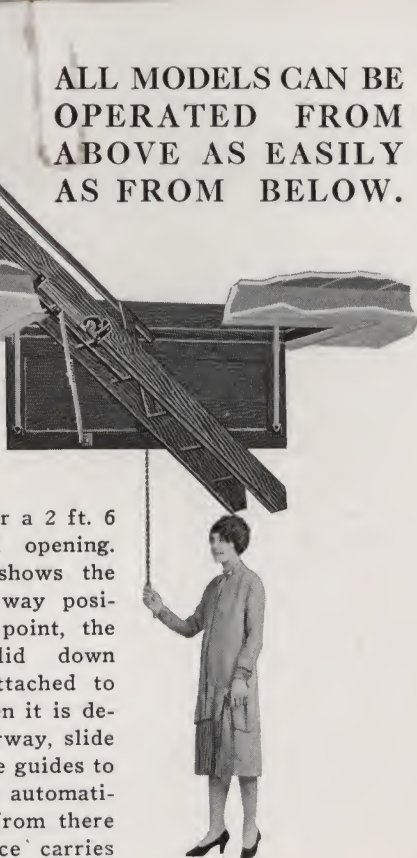

Model 39 Price \$39.00

Floor to Floor	Radius from Hinged End to Free Wall or Rafters. The Difference Plumb Up is 2" Less on Each Foot	From Front Edge of Stair Stringers to Landing When Stair is Down on Floor	Finished Opening
7 ft. 7 in.	4 ft. 8 in.	5 ft. 6 in.	2 ft. 6 in. x 5 ft. 6 in.
8 ft. 1 in.	5 ft. 0 in.	5 ft. 10 in.	2 ft. 6 in. x 5 ft. 6 in.
8 ft. 7 in.	5 ft. 4 in.	6 ft. 2 in.	2 ft. 6 in. x 5 ft. 6 in.
9 ft. 1 in.	5 ft. 7 in.	6 ft. 6 in.	2 ft. 6 in. x 6 ft.
9 ft. 7 in.	6 ft. 0 in.	6 ft. 10 in.	2 ft. 6 in. x 6 ft.

Average shipping weight 88 pounds.

hose shown, the same measure. Stringers, treads, hand- of panel is not stained so room where it is installed.

Oak, Birch, Gum or Chestnut \$5.00 extra. Prices are for e Flush Oak or Birch panel \$5 change without notice. We d

NUMBER AND GIVE FLOOR T



This stairway is another one of our latest improved models, very similar in construction and operation to our Model 35 shown on this side of folder, except that Model 45 requires a finished opening 2 ft. 6 in. wide. Made in standard sizes from 7 ft. 7 in. to 10 ft. 7 in. floor to floor. Considerable heat accumulates in the attic during the summer due to improper ventilation, making the rooms below very uncomfortable. By installing a Bessler you will have a handy way to get into the attic to open or close the windows and thereby properly ventilate that space. The attic is a wonderful place for drying clothes away from the soot and dust during the winter months and on rainy days.

Model 45 Price \$45.00

Floor to Floor	Radius from Hinged End to Free Wall or Rafters. The Difference Plumb Up is 2" Less on Each Foot	From Front Edge of Stair Stringers to Landing When Stair is Down on Floor	Finished Opening
7 ft. 7 in.	4 ft. 10 in.	5 ft. 6 in.	2 ft. 6 in. x 5 ft. 6 in.
8 ft. 1 in.	5 ft. 3 in.	5 ft. 10 in.	2 ft. 6 in. x 5 ft. 6 in.
8 ft. 7 in.	5 ft. 7 in.	6 ft. 2 in.	2 ft. 6 in. x 5 ft. 6 in.
9 ft. 1 in.	5 ft. 11 in.	6 ft. 6 in.	2 ft. 6 in. x 5 ft. 6 in.
9 ft. 7 in.	6 ft. 6 in.	6 ft. 10 in.	2 ft. 6 in. x 6 ft.
10 ft. 1 in.	6 ft. 10 in.	7 ft. 2 in.	2 ft. 6 in. x 6 ft.
10 ft. 7 in.	7 ft. 1 in.	7 ft. 6 in.	2 ft. 6 in. x 6 ft.

Average shipping weight 90 pounds.

panel \$3.00 extra. Sizes above 10 ft. 7 in. hardwood panel
 er one or two panel doors. Flush Pine panel \$3.00 extra.
 0 extra. All prices are F. O. B. Akron, O., and subject to
 not furnish trim for finishing the openings on any models.

0 FLOOR HEIGHT



This stairway has its panel hinged on the end which helps to support the stair stringers. It has two spring drums at the head of the landing. This model is furnished in sizes up to 10 ft. 7 in. from floor to floor. Convert that unused attic space into a bedroom, sewing room, play room or for storage space and install one of our space saving stairways to gain easy access to it. There are five more models on other side of this folder.

NACHARY BUILDERS SUPPLY CO.

**802 PERDIDO ST.
NEW ORLEANS, LA.**


Model 50 Price \$50.00 ✓

Floor to Floor	Radius from Hinged End to Free Wall or Rafters. The Difference Plumb Up is 2" Less on Each Foot	From Front Edge of Stair Stringers to Landing When Stair is Down on Floor	Finished Opening
7 ft. 7 in.	4 ft. 10 in.	5 ft. 6 in.	2 ft. x 5 ft. 6 in.
8 ft. 1 in.	5 ft. 3 in.	5 ft. 10 in.	2 ft. x 5 ft. 6 in.
8 ft. 7 in.	5 ft. 7 in.	6 ft. 2 in.	2 ft. x 5 ft. 6 in.
9 ft. 1 in.	5 ft. 9 in.	6 ft. 6 in.	2 ft. x 5 ft. 6 in.
9 ft. 7 in.	6 ft. 4 in.	6 ft. 10 in.	2 ft. x 6 ft.
10 ft. 1 in.	6 ft. 6 in.	7 ft. 2 in.	2 ft. x 6 ft.
10 ft. 7 in.	7 ft. 0 in.	7 ft. 6 in.	2 ft. x 6 ft.

Average shipping weight 92 pounds.

The Bessler Disappearing Stairway Co.
Akron, Ohio

Printed in U. S. A.

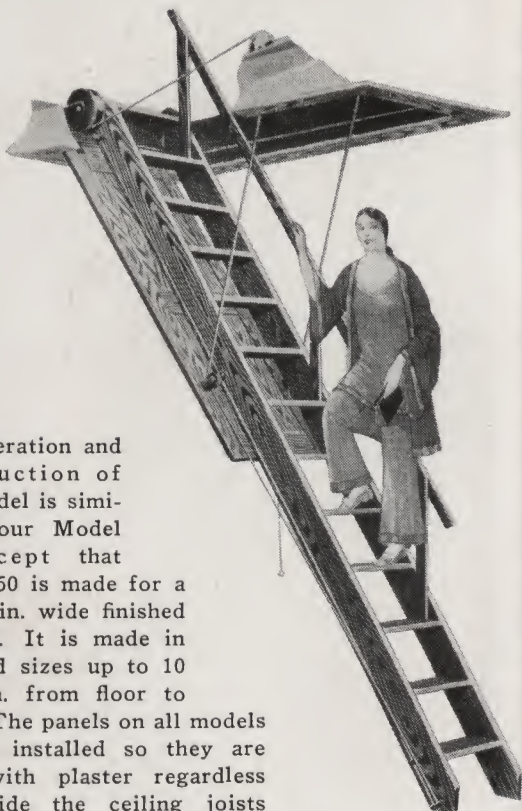

The operation and construction of this model is similar to our Model 50 except that Model 60 is made for a 2 ft. 6 in. wide finished opening. It is made in standard sizes up to 10 ft. 7 in. from floor to floor. The panels on all models can be installed so they are flush with plaster regardless how wide the ceiling joists are. When planning your home, you can make it more modern, convenient and comfortable by installing our space saving stairway. You will add another story at low cost without taking up any space in the room below.

Model 60 Price \$60.00

Floor to Floor	Radius from Hinged End to Free Wall or Rafters. The Difference Plumb Up is 2" Less on Each Foot	From Front Edge of Stair Stringers to Landing When Stair is Down on Floor	Finished Opening
7 ft. 7 in.	4 ft. 10 in.	5 ft. 6 in.	2 ft. 6 in. x 5 ft. 6 in.
8 ft. 1 in.	5 ft. 3 in.	5 ft. 10 in.	2 ft. 6 in. x 5 ft. 6 in.
8 ft. 7 in.	5 ft. 7 in.	6 ft. 2 in.	2 ft. 6 in. x 5 ft. 6 in.
9 ft. 1 in.	5 ft. 9 in.	6 ft. 6 in.	2 ft. 6 in. x 5 ft. 6 in.
9 ft. 7 in.	6 ft. 4 in.	6 ft. 10 in.	2 ft. 6 in. x 6 ft.
10 ft. 1 in.	6 ft. 6 in.	7 ft. 2 in.	2 ft. 6 in. x 6 ft.
10 ft. 7 in.	7 ft. 0 in.	7 ft. 6 in.	2 ft. 6 in. x 6 ft.

Average shipping weight 95 pounds.

The Bessler Disappearing Stairway Co.
Akron, Ohio



Model No. 75 is another one of our latest improved stairways. The panel is $1\frac{1}{8}$ in. thick and 2 ft. 6 in. wide. Length of panel varies according to size of stairway. This model has four spring drums, two of these are installed on jambs to operate the panel and the other two are located at top of stairway to assist the operator in sliding the stringers over panel. An automatic locking device located on the side of stringer holds the stairway in place while it is being opened and closed. The very best materials obtainable for our purpose are used in the manufacture of our stairways. They range in size and price so they will meet most every requirement.

Model 75 Price \$75.00

Floor to Floor	Radius from Hinged End to Free Wall or Rafters. The Difference Plumb Up is 2" Less on Each Foot	From Front Edge of Stair Stringers to Landing When Stair is Down on Floor	Finished Opening
7 ft. 7 in.	4 ft. 6 in.	5 ft. 6 in.	2 ft. 6 in. x 5 ft. 10 in.
8 ft. 1 in.	4 ft. 11 in.	5 ft. 10 in.	2 ft. 6 in. x 5 ft. 10 in.
8 ft. 7 in.	5 ft. 3 in.	6 ft. 2 in.	2 ft. 6 in. x 5 ft. 10 in.
9 ft. 1 in.	5 ft. 6 in.	6 ft. 6 in.	2 ft. 6 in. x 5 ft. 10 in.
9 ft. 7 in.	6 ft. 4 in.	6 ft. 10 in.	2 ft. 6 in. x 6 ft.
10 ft. 1 in.	6 ft. 6 in.	7 ft. 2 in.	2 ft. 6 in. x 6 ft.
10 ft. 7 in.	7 ft. 0 in.	7 ft. 6 in.	2 ft. 6 in. x 6 ft.

Average shipping weight 110 pounds.

Stairways are shipped in dustproof cartons which lower freight costs and assure the customer that the stairway will be received in the very best condition.

ORDER BY MODEL



This stairway is one of the heavier models, built stronger throughout. Model 89 is made in standard sizes from 7 ft. 7 in. to 10 ft. 7 in. and for a 2 ft. 6 in. wide finished opening. The panel is $1\frac{1}{8}$ in. and its length varies according to the floor to floor height. It has two spring drums and two spring barrels. One closes the panel and the other assists the operator in sliding the stairway over panel. A lug on each outside cable strikes against sheave wheel on jamb bracket when stairway is opened and holds it to the correct run. The stringers and treads on Models 89 and 97 are made from 8" material and all other models are made from 6".

Model 89

Floor to Floor	Radius from Hinged End to Free Wall or Rafters. The Difference Plumb Up is $2\frac{1}{4}$ " Less on Each Foot	From Front Edge of Stair Stringers to Landing When Stair is Down on Floor	Finished Opening		Price
7 ft. 7 in.	4 ft. 4 in.	6 ft. 5 in.	2 ft. 6 in. x	5 ft. 10 in.	\$ 89
8 ft. 1 in.	4 ft. 11 in.	6 ft. 10 in.	2 ft. 6 in. x	5 ft. 10 in.	89
8 ft. 7 in.	5 ft. 7 in.	7 ft. 3 in.	2 ft. 6 in. x	5 ft. 10 in.	89
9 ft. 1 in.	6 ft. 2 in.	7 ft. 7 in.	2 ft. 6 in. x	6 ft. 0 in.	89
9 ft. 7 in.	6 ft. 4 in.	8 ft. 0 in.	2 ft. 6 in. x	6 ft. 4 in.	91
10 ft. 1 in.	6 ft. 8 in.	8 ft. 4 in.	2 ft. 6 in. x	6 ft. 8 in.	91
10 ft. 7 in.	7 ft. 1 in.	8 ft. 9 in.	2 ft. 6 in. x	6 ft. 11 in.	91

Average shipping weight 165 pounds.

GUARANTEE:

Use any of our models for six months, and if not satisfactory, return the stairway to us at our expense.

NUMBER AND GIVE FLOOR T



The new improved Model 97 stairway has an operating machine very similar to the one used on the all-steel Model 300. It has four spring drums, each one working separately. All main bearings are brass bushed and the stair stringers work on roller bearings. The $1\frac{1}{8}$ in. panel is made for a 2 ft. 6 in. wide finished opening and the length varies according to the floor to floor height. There is a lug on each panel cable that holds the stairway to its proper run. When placing order give exact floor to floor height and thickness of ceiling construction.

Floor to Floor	Radius from Hinged End to Free Wall or Rafters. The Difference Plumb Up is $2\frac{1}{4}$ " Less on Each Foot	From Front Edge of Stair Stringers to Landing When Stair is Down on Floor	Model 97	
			Finished Opening	Price
7 ft. 7 in.	4 ft. 4 in.	6 ft. 5 in.	2 ft. 6 in. x 5 ft. 10 in.	\$ 97
8 ft. 1 in.	4 ft. 11 in.	6 ft. 10 in.	2 ft. 6 in. x 5 ft. 10 in.	97
8 ft. 7 in.	5 ft. 7 in.	7 ft. 3 in.	2 ft. 6 in. x 5 ft. 10 in.	97
9 ft. 1 in.	6 ft. 2 in.	7 ft. 7 in.	2 ft. 6 in. x 6 ft. 0 in.	97
9 ft. 7 in.	6 ft. 4 in.	8 ft. 0 in.	2 ft. 6 in. x 6 ft. 4 in.	99
10 ft. 1 in.	6 ft. 8 in.	8 ft. 4 in.	2 ft. 6 in. x 6 ft. 8 in.	99
10 ft. 7 in.	7 ft. 1 in.	8 ft. 9 in.	2 ft. 6 in. x 6 ft. 11 in.	99
11 ft. 1 in.	7 ft. 6 in.	9 ft. 2 in.	2 ft. 6 in. x 7 ft. 3 in.	105
11 ft. 7 in.	7 ft. 9 in.	9 ft. 6 in.	2 ft. 6 in. x 7 ft. 6 in.	105
12 ft. 1 in.	8 ft. 1 in.	9 ft. 10 in.	2 ft. 6 in. x 7 ft. 9 in.	105
12 ft. 7 in.	8 ft. 5 in.	10 ft. 3 in.	2 ft. 6 in. x 8 ft. 1 in.	105
13 ft. 1 in.	8 ft. 9 in.	10 ft. 8 in.	2 ft. 6 in. x 8 ft. 4 in.	112
13 ft. 7 in.	9 ft. 1 in.	11 ft. 0 in.	2 ft. 6 in. x 8 ft. 8 in.	112
14 ft. 1 in.	9 ft. 5 in.	11 ft. 5 in.	2 ft. 6 in. x 9 ft. 0 in.	112
14 ft. 7 in.	9 ft. 8 in.	11 ft. 9 in.	2 ft. 6 in. x 9 ft. 3 in.	120
15 ft. 1 in.	10 ft. 3 in.	12 ft. 3 in.	2 ft. 6 in. x 9 ft. 6 in.	120
15 ft. 7 in.	10 ft. 9 in.	12 ft. 10 in.	2 ft. 6 in. x 9 ft. 9 in.	120
16 ft. 1 in.	11 ft. 1 in.	13 ft. 1 in.	2 ft. 6 in. x 10 ft. 1 in.	135

Average shipping weight 190 pounds.

Rough openings for the wood models are made two inches larger than the measurements shown for the finished.

O FLOOR HEIGHT



Model No. 300 is an all-steel stairway designed to be used in fire proof buildings or in any location where a heavy duty stairway is required. Made in all standard sizes to 16 ft. 7 in. floor to floor and for a finished opening 2 ft. 6 in. wide. Length of opening varies according to size of stairway. Handrail is placed on right side unless ordered for left. When placing order give exact floor to floor height and thickness of ceiling construction.

Model 300


Floor to Floor	Radius from Hinged End to Free Wall or Rafters. The Difference Plumb Up is 2 1/4" Less on Each Foot	From Front Edge of Stair Stringers to Landing When Stair is Down on Floor	Finished Opening	Price
7 ft. 7 in.	5 ft. 2 in.	6 ft. 5 in.	2 ft. 6 in. x 5 ft. 10 in.	\$300
8 ft. 1 in.	5 ft. 9 in.	6 ft. 10 in.	2 ft. 6 in. x 5 ft. 10 in.	300
8 ft. 7 in.	6 ft. 5 in.	7 ft. 3 in.	2 ft. 6 in. x 5 ft. 10 in.	300
9 ft. 1 in.	7 ft. 0 in.	7 ft. 7 in.	2 ft. 6 in. x 6 ft. 0 in.	325
9 ft. 7 in.	7 ft. 2 in.	8 ft. 0 in.	2 ft. 6 in. x 6 ft. 4 in.	350
10 ft. 1 in.	7 ft. 6 in.	8 ft. 4 in.	2 ft. 6 in. x 6 ft. 8 in.	375
10 ft. 7 in.	7 ft. 11 in.	8 ft. 9 in.	2 ft. 6 in. x 6 ft. 11 in.	400
11 ft. 1 in.	8 ft. 4 in.	9 ft. 2 in.	2 ft. 6 in. x 7 ft. 3 in.	425
11 ft. 7 in.	8 ft. 7 in.	9 ft. 6 in.	2 ft. 6 in. x 7 ft. 6 in.	450
12 ft. 1 in.	8 ft. 11 in.	9 ft. 10 in.	2 ft. 6 in. x 7 ft. 9 in.	475
12 ft. 7 in.	9 ft. 3 in.	10 ft. 3 in.	2 ft. 6 in. x 8 ft. 1 in.	500
13 ft. 1 in.	9 ft. 7 in.	10 ft. 8 in.	2 ft. 6 in. x 8 ft. 4 in.	525
13 ft. 7 in.	9 ft. 11 in.	11 ft. 0 in.	2 ft. 6 in. x 8 ft. 8 in.	550
14 ft. 1 in.	10 ft. 3 in.	11 ft. 5 in.	2 ft. 6 in. x 9 ft. 0 in.	575
14 ft. 7 in.	10 ft. 6 in.	11 ft. 9 in.	2 ft. 6 in. x 9 ft. 3 in.	600
15 ft. 1 in.	11 ft. 1 in.	12 ft. 3 in.	2 ft. 6 in. x 9 ft. 6 in.	625
15 ft. 7 in.	11 ft. 7 in.	12 ft. 10 in.	2 ft. 6 in. x 9 ft. 9 in.	650
16 ft. 1 in.	11 ft. 11 in.	13 ft. 1 in.	2 ft. 6 in. x 10 ft. 1 in.	675
16 ft. 7 in.	12 ft. 4 in.	13 ft. 4 in.	2 ft. 6 in. x 10 ft. 5 in.	700

Average shipping weight 600 pounds.

The Bessler Disappearing Stairway Co.
Akron, Ohio



Model No. 300 is an all-steel stairway designed to be used in fire proof buildings or in any location where a heavy duty stairway is required. Made in all standard sizes to 16 ft. 7 in. floor and for a finished opening 6 in. wide. Length of handrail varies according to size. Handrail is placed on left or right as ordered. For left or right order give exact floor level and thickness of ceiling.

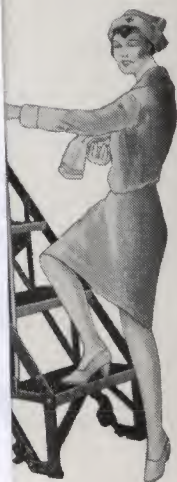

Tulane University: Southeastern Architectural Archive <http://seaa.tulane.edu>

Digitized by ASSOCIATION FOR PRESERVATION TECHNOLOGY, www.apti.org for the
 BUILDING TECHNOLOGY HERITAGE LIBRARY
<https://archive.org/details/buildingtechnologyheritagelibrary>
 From the collection of

Model 300

Floor to Floor	Radius from Hinged End to Free Wall or Rafters. The Difference Plumb Up is 2 1/4" Less on Each Foot	Finished Floor to Wall is
7 ft. 7 in.	5 ft. 2 in.	6
8 ft. 1 in.	5 ft. 9 in.	6
8 ft. 7 in.	6 ft. 5 in.	7
9 ft. 1 in.	7 ft. 0 in.	7
9 ft. 7 in.	7 ft. 2 in.	8
10 ft. 1 in.	7 ft. 6 in.	8
10 ft. 7 in.	7 ft. 11 in.	8
11 ft. 1 in.	8 ft. 4 in.	9
11 ft. 7 in.	8 ft. 7 in.	9
12 ft. 1 in.	8 ft. 11 in.	9
12 ft. 7 in.	9 ft. 3 in.	10
13 ft. 1 in.	9 ft. 7 in.	10
13 ft. 7 in.	9 ft. 11 in.	11
14 ft. 1 in.	10 ft. 3 in.	11
14 ft. 7 in.	10 ft. 6 in.	11
15 ft. 1 in.	11 ft. 1 in.	12
15 ft. 7 in.	11 ft. 7 in.	12
16 ft. 1 in.	11 ft. 11 in.	13
16 ft. 7 in.	12 ft. 4 in.	13

Opening	Price
5 ft. 10 in.	\$300
5 ft. 10 in.	300
5 ft. 10 in.	300
5 ft. 0 in.	325
5 ft. 4 in.	350
5 ft. 8 in.	375
5 ft. 11 in.	400
6 ft. 3 in.	425
6 ft. 6 in.	450
6 ft. 9 in.	475
6 ft. 1 in.	500
6 ft. 4 in.	525
6 ft. 8 in.	550
6 ft. 0 in.	575
6 ft. 3 in.	600
6 ft. 6 in.	625
6 ft. 9 in.	650
6 ft. 1 in.	675
6 ft. 5 in.	700

Average shipping

nds.

The Bessler Disappearing Stairway Co.
 Akron, Ohio